



Industrial Equipment Cabinet

NEMA12 for Harsh Applications

Pre-configured and Unloaded Versions Available

Pre-punched Rear Panel for the Same Functions as Commercial REBOX

Locking and Grounding Hardware Kits Available



SPECIFICATIONS

- ◆ 14 gauge steel construction on body and door
- ◆ Continuously plasma-welded seams
- ◆ ¼ turn oil-tight latches on door
- ◆ Poured-in polyurethane gasket on door
- ◆ ANSI 61 Gray polyester inside and out over phosphatized surfaces
- ◆ Industrial REBOX Dimensions:
IR2UG: 24"H x 24"W x 12"D
IR3UG: 36"H x 24"W x 12"D
IR4UG 48"H x 24"W x 12"D

APPROVALS

- Dust and watertight to NEMA12
- UL Listed to UL508 type 12 enclosures*
- CSA Certified types 4 and 12**
- NEMA/EEMAC types 4, 12, and 13
- JIC EL-1-7



* UL File #E64791

** CSA File #LL66078

Hubbell's Industrial REBOX® is designed for harsh environments where oil, dirt dust and moisture are present. It meets NEMA type 4, 12 and 13 requirements.

The Industrial REBOX includes a dust and watertight gasket built into the door. A specially designed mounting plate at the rear of the enclosure allows mounting of standard REBOX accessories, brackets and kits. Unloaded versions are available, without the mounting plate, to allow user-configurable brackets to be installed.

APPLICATIONS

- ✓ Factory floor and process control
- ✓ Convention centers
- ✓ Harsh institutions - correctional facilities
- ✓ Commercial kitchens



ORDER INFORMATION




REBOX® - Industrial Equipment Cabinet

Delivery: 1 enclosure
 Pre-Configured versions include:
REK19 - Bottom Hinged Patch Panel Bracket, 4U
REKZ - Equipment Mounting Bracket, 5U


Rack Units	Height	Width	Depth	Version	Color	Catalog No.
13	24" (610)	24" (610)	12" (305)	Unloaded	Gray	IR2UG
20	36" (914.4)	24" (610)	12" (305)	Unloaded	Gray	IR3UG
27	48" (1219.2)	24" (610)	12" (305)	Unloaded	Gray	IR4UG
20	36" (914.4)	24" (610)	12" (305)	Pre-Configured	Gray	IR3PG
27	48" (1219.2)	24" (610)	12" (305)	Pre-Configured	Gray	IR4PG

- ❶ Front cover ¼-turn latches for secure closure
- ❷ Dust and water-tight gasket on door
- ❸ Rear mounting panel with equipment mounting brackets (pre-configured enclosures only)
- ❹ Print pocket is provided

DIMENSIONS

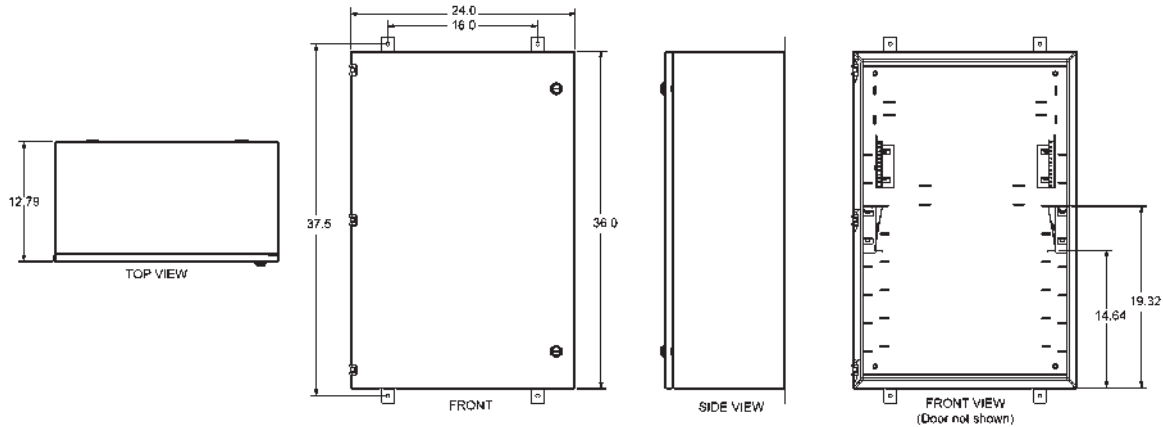

ACCESSORIES

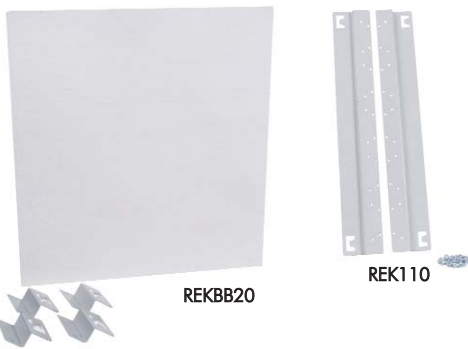

Description	Catalog No.
Plywood Backboard, 20"H x 19"W (for wall mounting)	REKBB20
Plywood Backboard, 30"H x 19"W (for wall mounting)	REKBB30
Plywood Backboard, 40"H x 19"W (for wall mounting)	REKBB40
Equipment Mounting Bracket, 5U	REKZ
110/66 Block Mounting Rails (accepts five 100-pair/110-pair blocks)	REK110
Patch Panel Bracket, Bottom-hinged, 4U	REK19
Patch Panel Bracket, Fiber Optic (accepts 1 FSP adapter panel)	REKFP
Economy Power Supply Kit, 15A	REKP



Hubbell Premise Wiring

HUBBELL INCORPORATED (Delaware)
 14 Lord's Hill Road • Stonington, CT 06378-0901 • (860) 535-8326 • 800-626-0005
 Fax: (860) 535-8328 • Internet site: <http://www.hubbell-premise.com>

Worldwide Locations

Hubbell Premise Wiring, Asia Pacific	852-2836-7131	Fax: 852-2836-7132	Hubbell de Mexico, S.A. de C.V.	52-5-559-5304	Fax: 52-5-559-5885
Hubbell Canada Inc.	905-839-1138	Fax: 905-839-9108	Hubbell Premise Wiring, Middle East	971-4-393-4192	Fax: 971-4-393-4194
Hubbell Premise Wiring, China	8621-6309-0119	Fax: 8621-6309-0122	Hubbell Premise Wiring, Puerto Rico	787-720-7185	Fax: 787-789-2796
Hubbell Premise Wiring, Europe	44-(0)1234-848550	Fax: 44-(0)1234-856190	Hubbell-Taian Co., Ltd., Taiwan	886-2-(0)2515-0855	Fax: 886-2-(0)2515-0899
Hubbell Int'l. Inc., Korea Branch	82-2-(0)2607-1363	Fax: 82-2-(0)2603-7386	Hubbell Incorporated, Turkey	90-216-414-8147	Fax: 90-216-414-8148
Hubbell Premise Wiring, Latin America	305-251-4236	Fax: 305-251-4087	Hubbell Premise Wiring, Venezuela	58-16-6807453	Fax: 58-281-2820323