

- Weather-proof protection and cooling for network switches, PoE devices and equipment deployed outside facility
- Top mounted patch panel allows for efficient cable use and convenient patch cord installation
- Utilize shared accessories with RE-BOX®, QUADCAB® and IDF wall mount enclosures

## FEATURES

- Active closed-loop cooling system to maintain equipment operating temperature range
- Keyed locking door compresses gasket to ensure lifetime weather rating
- Steel construction with a baked powder coat finish withstands outside environmental conditions

## SPECIFICATIONS

- NEMA/IEEEMAC Types 4, 12 and 13
- 14 gauge steel
- ANSI 61 gray polyester powder coat
- 19" rack mount width
- Poured-in polyurethane door gasket

## STANDARDS

- EIA/ECA 310-E
- UL and cUL
- NEMA 4/12/13

## HUBBELL RE-BOX Industrial Enclosure with Cooling



Hubbell's Industrial RE-BOX® Enclosure with Cooling product offering allows deployment of network equipment outside of the data center while maintaining an appropriate temperature operating range. High quality manufacturing and installer friendly configurations ensure that equipment is safe from environmental factors and meet the many challenges of outside plant installations.

## APPLICATIONS

- Parking garages
- Outdoor
- Roof top
- Fiber interconnect
- Security
- Campus



**RE-BOX® VERTICAL ENCLOSURES**

Requires: 1160 BTU air conditioner (IRAC1)  
Includes: enclosure, 5U bracket, 4U patch panel bracket

Height	Width	Depth	Rack Units	Catalog No.
24"	24"	12"	9	<b>IR221APG</b>
36"	24"	12"	9	<b>IR321APG</b>
48"	24"	12"	9	<b>IR421APG</b>

**STANDARD ENCLOSURES**

Requires: 3000 BTU air conditioner (IRAC3)  
Includes: enclosure, rail, 50 pack M6 cage nuts

Height	Width	Depth	Rack Units	Catalog No.
24"	24"	24"	12	<b>IR222APG</b>
36"	24"	24"	19	<b>IR322APG</b>

**FIBER KIT ENCLOSURE**

Requires: 2000 BTU air conditioner (IRAC2)  
Contents: enclosure, 2U equipment bracket, fiber patch panel kit, 20A power receptacle kit

Height	Width	Depth	Rack Units	Catalog No.
24"	14"	16"	2	<b>IR211AFK</b>

**AIR CONDITIONERS**

Requires: 110V service  
Includes: A/C unit, mounting brackets

BTU	Amp	Catalog No.
1160	4.3	<b>IRAC1</b>
2000	4	<b>IRAC2</b>
3000	6	<b>IRAC3</b>

**FLOOR STANDING KIT**


Includes: (2) floor standing supports

Height	Width	Depth	Catalog No.
18"	24"	12"	<b>IRF1812</b>
12"	24"	24"	<b>IRF1224</b>

**ACCESSORIES**

Description	Catalog No.
4U patch panel mounting bracket	<b>REK19</b>
5U equipment mounting bracket	<b>REKZ</b>
Cement anchors 4pk	<b>HPWRRRA</b>
Bonding busbar	<b>REKGB</b>

**DIMENSIONS**

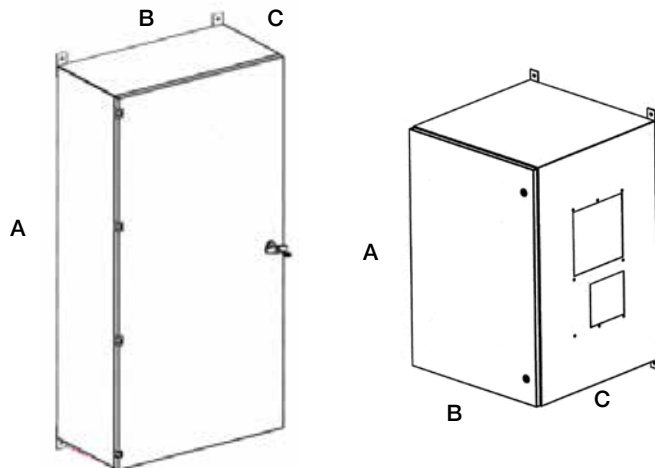

Enclosure	Catalog No.	A	B	C
Vertical	IR221APG	24"	24"	12"
	IR321APG	36"	24"	12"
	IR421APG	48"	24"	12"
Standard	IR222APG	24"	24"	24"
	IR322APG	36"	24"	24"
Fiber	IR211AFK	24"	14"	16"